

DESCRIPTION

The GLF73710 is an I_QSmart™ ultra-efficient, full battery protection switch with an accurate over charge voltage, over discharge voltage, and short circuit protection for lithium-Ion/Polymer battery safety.

The over discharge voltage protections keep a rechargeable battery working within the desired safe operating condition. When the battery voltage decreases below the over discharge detection voltage level, the GLF73710 switch is turned off immediately to cut off the battery power rail, consuming an ultra-low leakage current (I_{SD}) to save the battery. In addition, when the load current reaches the I_{SC} short circuit protection level, the GLF73710 switch is turned off and will maintain the off state to avoid any serious damage to system. The short circuit delay time avoids any false trigger which might open the switch.

When a charged battery cell is connected with the GLF73710, the GLF73710 remains in the off state and consumes an ultra-low leakage current (I_{SD}) until the V_{ON} voltage is applied to V_{OUT} pin. Note that the GLF73710 is activated only by a V_{ON} voltage from a charger output.

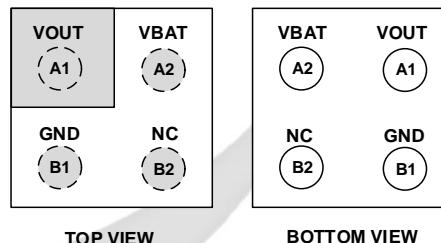
FEATURES

- V_{OD} , Over Discharge Detection: 2.88 V_{BAT}
- Load Short Circuit Protection with Delay Time to avoid a false trigger
- GLF73710 is Activated by Applying V_{ON} to the V_{OUT} Pin from Charger
- 1.5 A Continuous Charging Current Capability from V_{OUT} to V_{BAT} Pin
- Low R_{ON} : 31 mΩ Typ. @ 3.6 V_{BAT}
- Quiescent Current, $I_Q = 700$ nA Typ @ 4.2 V_{BAT}
- Shutdown Current, $I_{SD} = 35$ nA Typ @ $V_{BAT} < V_{OD}$
- Latch-off at Over Discharge Detection and Short Circuit Protection. Apply V_{ON} to V_{OUT} pin to turn on GLF73710 switch again
- 0.5 V Battery Minimum Voltage for Charging
- 0.97 mm x 0.97 mm x 0.55 mm Chip Scale Package 4 Bumps, 0.5 mm Pitch

APPLICATIONS

- BLE Wireless Earphone
- Wearables / IoT Devices
- Hearing Aid

PACKAGE

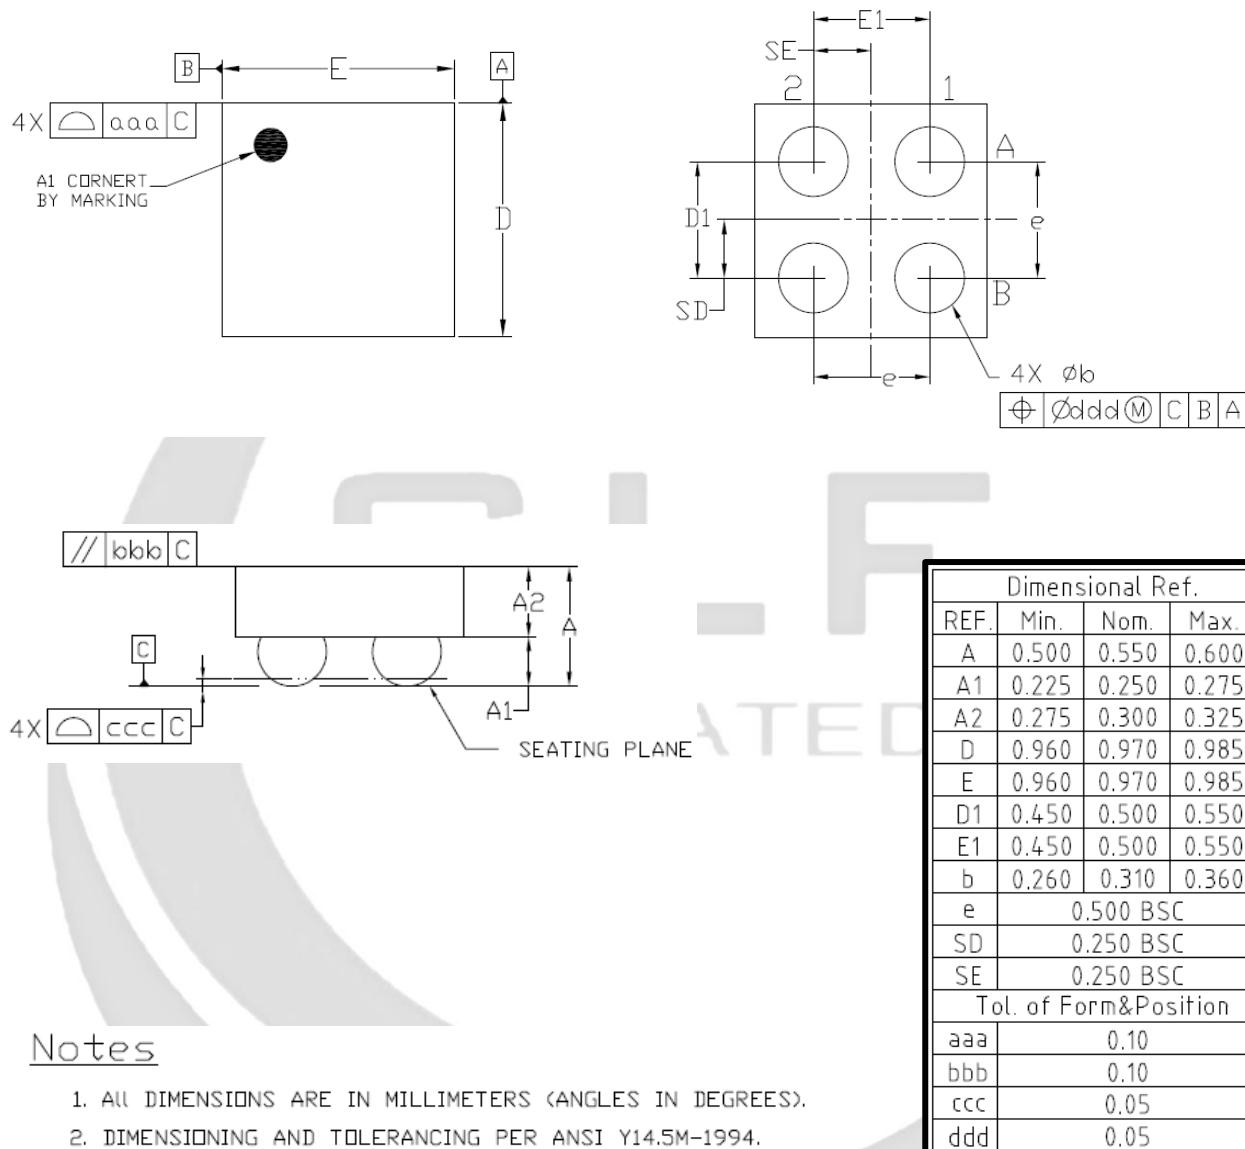


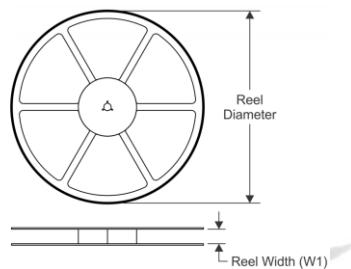
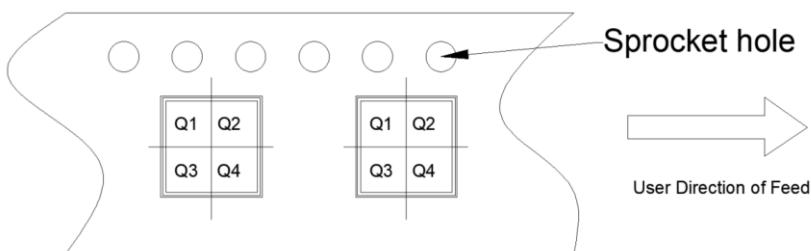
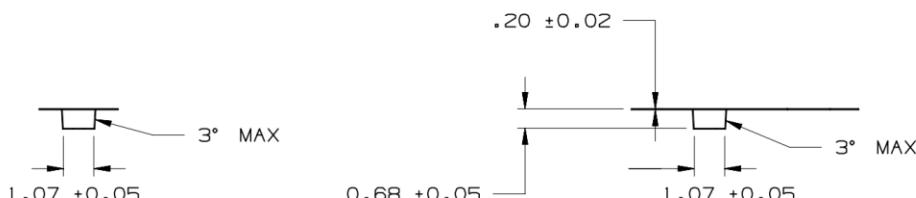
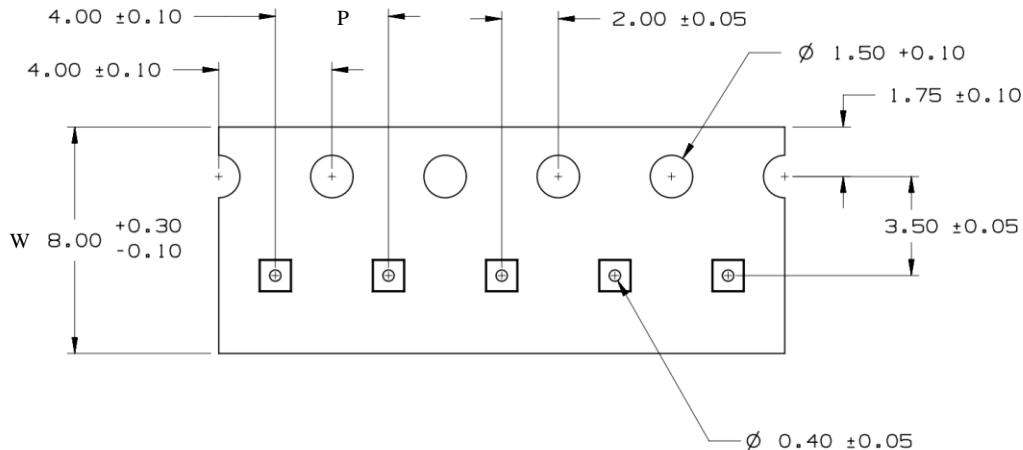
TOP VIEW

BOTTOM VIEW

0.97 mm x 0.97 mm x 0.55 mm WLCSP

PACKAGE OUTLINE



TAPE AND REEL INFORMATION
REEL DIMENSIONS

QUADRANT ASSIGNMENTS PIN 1 ORIENTATION TAPE

TAPE DIMENSIONS


Device	Package	Pins	SPQ	Reel Diameter(mm)	Reel Width W1	A0	B0	K0	P	W	Pin1
GLF73710	WLCSP	4	3000	180	9	1.07	1.07	0.68	4	8	Q1

Remark:

A0: Dimension designed to accommodate the component width

B0: Dimension designed to accommodate the component length

C0: Dimension designed to accommodate the component thickness

W: Overall width of the carrier tape

P: Pitch between successive cavity centers